




## Dismantling joints with 3 flanges, PN 64

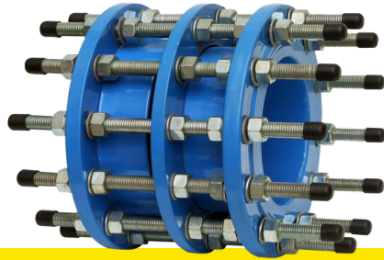

Art. 20044

Flanges: UNI EN 1092-2 PN 64

Installation: horizontal / vertical

APPLICATIONS • Water supply • Industry • Irrigation •

Pumping stations • Water treatment plants •

Hydropower plants • Reservoirs • Sewage


Epoxy painting suitable for drinking water applications.

The dismantling joints with 3 flanges are used in order to mount and dismantle valves from the pipeline. The extensible construction of dismantling joints allows to change the length of the joint itself, for easier installation or dismantling procedures. The body of the joint is made in ductile iron or cast steel with epoxy resin coating, with rubber gasket NBR and galvanized steel studs and bolts.

### Materials

body	cast steel P 245 GH
stud	electro galvanized steel
gasket	rubber
painting	epoxy

## Dimensions

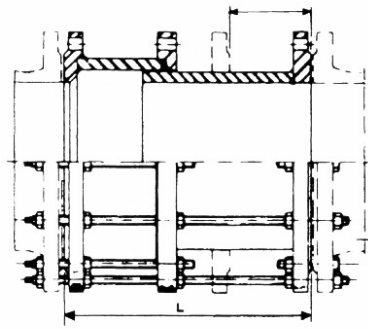

DN	L MAX mm.	L MIN mm.	C mm.	Weight kg.
80	240	190	50	80
100	250	200	50	100
125	250	200	50	100
150	260	210	50	150
200	260	210	50	200
250	280	230	50	300
300	280	230	50	358
350	300	250	50	400
400	310	260	50	458
450	310	260	50	500
500	320	270	50	600
600	350	310	50	700

