



Double flanged butterfly valves PN 16



Art. 5016

Flanges: UNI EN 1092-2 PN 16

Face to face length: EN 558-1, serie 14. DIN 3202 F4

Design: EN 593

Installation: with stem in horizontal position

APPLICATIONS • Water supply • Drinking water •

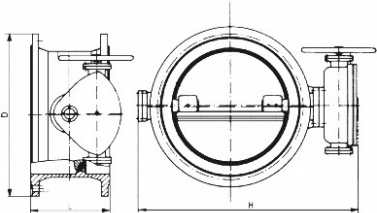
Waste water treatment plants

Epoxy painting suitable for drinking water applications.

The double flanged butterfly valves with eccentric disc are applied in the pipelines as shut-off device and as regulation valves, thanks to the gear box that can stop the disc in many intermediate positions. These double flanged butterfly valves with regular face to face DIN 3202 F4 allows the perfect exchange with regular flat body gate valves, whenever needed. The double flanged butterfly valves can stand both directions of fluid, gasket seals are on the disc and can be replaced without dismantling the valves from the pipeline. The double flanged butterfly valves with double eccentric disc can be installed in drinking water plants, being painted with epoxy powder. The gear box is suitable for electric actuator and installation is easy, taking off the handwheel from the gear box itself.

Materials

body	ductile iron GGG40-50, EN-GJS-400/500-15
disc	ductile iron GGG40-50, EN-GJS-400/500-15
gear box	cast iron GG25, EN-GJL-250
handwheel	cast iron GG25, EN-GJL-250
stem	stainless steel X 20 CR 13
body seat ring	stainless steel 304
painting	epoxy 250 mcr min.

Dimensions	DN	L mm.	H mm.	D mm.	Weight kg.
	150	210	450	285	47
	200	230	533	340	74
	250	250	600	405	97.5
	300	270	715	460	121.5
	350	290	765	520	182
	400	310	850	580	198
	450	330	965	640	254
	500	350	1080	715	334
	600	390	1220	840	420
	700	430	1307	910	631
	800	470	1542	1025	742
	900	510	1670	1125	990
	1000	550	1770	1255	1291
	1200	630	1962	1485	1601
	1400	710	2230	1685	2430
	1600	790	2510	1930	3500
	1800	870	2850	2130	7830
	2000	950	3000	2345	8732

Pressure	DN	Nominal pressure	Test pressure Mpa		Max working pressure Mpa
	mm	BAR	body	seat	80°C
	150-2000	16	2,4	1,76	1,6

